


Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters

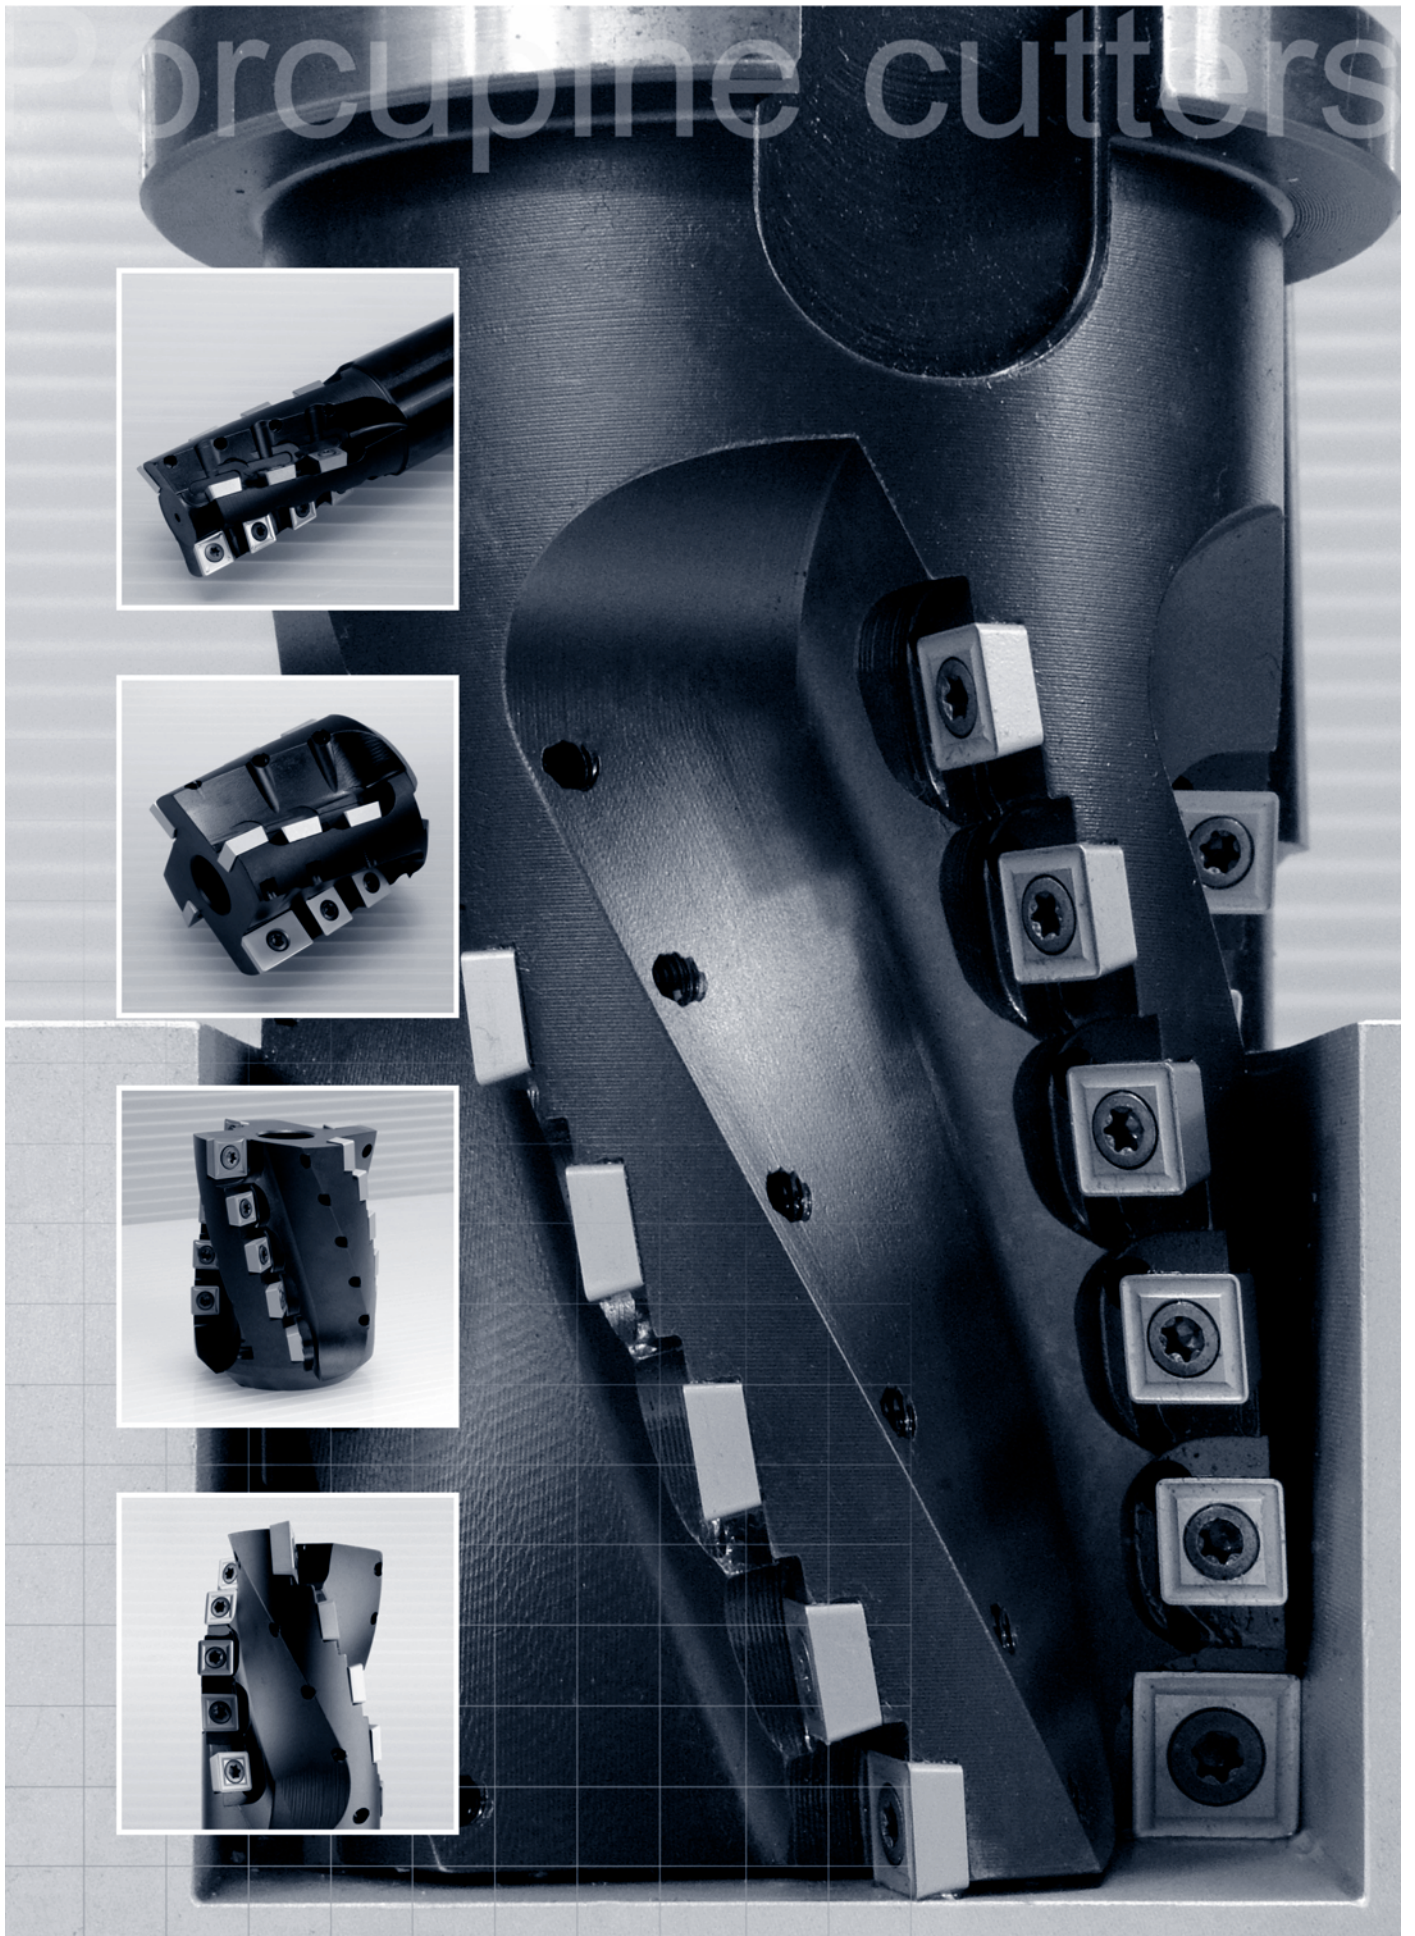

Porcupine cutters

Technical information	E.02
Code Key	E.02
Contents-Applications	E.03
Porcupine milling cutters	E.04
Cutting data	E.13

Porcupine cutters

Specific applications
and sets

Profile milling

Solid carbide

Drills

Boring heads

Arbors and
adaptors

Inserts

Face milling cutters


Square shoulder cutters

Slot cutters


Porcupine cutters

2 2	4 0	90	050	90	
1	2	3	4	5	6


1



2

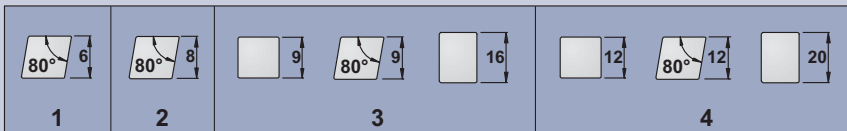


3




4

Short Weldon Ø12 Ø16 Ø20 Ø25 Ø32 Ø40 07	ISO ISO 30 43	DIN 2080 ISO 40 44	ISO 50 45	ISO 7388 7388 40 47	DIN 69871 A 7388 50 48	ISO BT 40 49	BT System BT 50 50	Direct spindle mounting 90
--	----------------------------	---------------------------------	---------------------	----------------------------------	-------------------------------------	---------------------------	---------------------------------	--------------------------------------

5

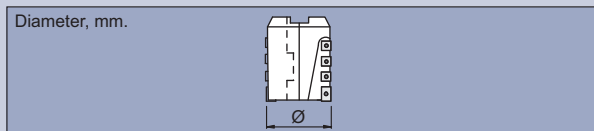

6

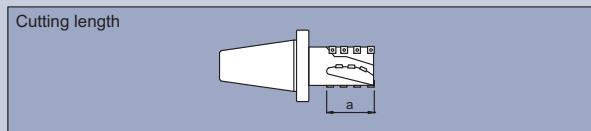

Porcupine milling cutters

<p>2240.90 Slot and side milling 90°</p>  <p>Page E.04 AP.. 1504.. SPM.. 1204..</p>	<p>2234.90 Slot and side milling 90°</p>  <p>Page E.05 SC.. 09T3.. SC.. 1204..</p>	<p>2234.⁴⁴₄₅ Slot and side milling 90°</p>  <p>Page E.06 SC.. 09T3.. SC.. 1204..</p>	<p>2234.⁴⁷₄₈ Slot and side milling 90°</p>  <p>Page E.07 SC.. 09T3.. SC.. 1204..</p>	<p>2234.⁴⁹₅₀ Slot and side milling 90°</p>  <p>Page E.08 SC.. 09T3.. SC.. 1204..</p>	<p>23¹/₃4.07 Slot and side milling 90°</p>  <p>Page E.09 CC.. 0602.. CC.. 0803.. CC.. 09T3..</p>
<p>2330.⁴⁷₄₈ Slot and side milling 90°</p>  <p>Page E.10 AP.. 1604..</p>	<p>2330.⁴⁹₅₀ Slot and side milling 90°</p>  <p>Page E.11 AP.. 1604..</p>	<p>23²/₃0.07 Slot and side milling 90°</p>  <p>Page E.12 AP.. 1003.. AP.. 1604..</p>			

- Porcupine cutters
- Specific applications and sets
- Profile milling
- Solid carbide
- Drills
- Boring heads
- Arbors and adaptors

Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centres.



2240.90

Ref.			D	L	d	a	Insert size	
2240.90.050.48	1+2		50	70	22	48	1 AP.. 2004.. + 11 SPM.. 1204..	0,600
2240.90.063.58	2+2		63	70	27	58	2 AP.. 2004.. + 10 SPM.. 1204..	0,850
2240.90.080.68	3+2		80	80	32	68	2 AP.. 2004.. + 16 SPM.. 1204..	1,900
2240.90.100.78	3+3		100	90	40	78	3 AP.. 2004.. + 21 SPM.. 1204..	2,600
2240.90.125.88	4+4		125	100	40	88	4 AP.. 2004.. + 32 SPM.. 1204..	5,850

Ref.			
2240.90.050.48	1550	5620	912,10
2240.90.063.58	1550	5620	912,12
2240.90.080.68	1550	5620	912,16
2240.90.100.78	1550	5620	912,20
2240.90.125.88	1550	5620	-

Ref.	AP.. / SPM..	l	s	d	AP.. Positive 11° clearance - Rectangular inserts. SPM.. Positive 11° clearance - Square insert.
	AP.. 2004..	20,00	4,76	12,70	
SPM.. 1204..	12,70	4,76	12,70		

For more information see page: A.12 / A.19

APMT	APMW	SPMT	SPMW






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines.



2234.90

Ref.		D	L	d	a	Insert size	
2234.90.063.65	2+2	63	80	27	65	2 SC.. 1204.. + 18 SC.. 09T3..	1,050
2234.90.080.75	2+3	80	90	32	75	2 SC.. 1204.. + 22 SC.. 09T3..	1,900
2234.90.100.85	3+3	100	100	40	85	3 SC.. 1204.. + 36 SC.. 09T3..	3,800
2234.90.125.95	4+4	125	110	40	95	4 SC.. 1204.. + 52 SC.. 09T3..	4,500


Ref.					
2234.90.063.65	1250	5620	1240	5615	912,12
2234.90.080.75	1250	5620	1240	5615	912,16
2234.90.100.85	1250	5620	1240	5615	912,20
2234.90.125.95	1250	5620	1240	5615	-

SC.. 1204..

SC.. 09T3..

Ref.	SC..	l	s	d	Positive 7° clearance - Square inserts.
	SC.. 09T3..		9,52	3,97	
	SC.. 1204..		12,70	4,76	12,70

SCGT-AL	SCMT-39	SCMW			



For more information see page: A.16

Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with DIN-2080 shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.



2234.44
2234.45

Ref.	Flutes	D	L2	K	a	Insert size	kg
2234.44.040.60	1+2	40	105	40	60	1 SC.. 1204.. + 13 SC.. 09T3..	1,300
2234.44.050.65	1+2	50	105	40	65	1 SC.. 1204.. + 14 SC.. 09T3..	1,700
2234.45.040.70	1+2	40	123	50	70	1 SC.. 1204.. + 14 SC.. 09T3..	3,250
2234.45.050.75	1+2	50	128	50	75	1 SC.. 1204.. + 16 SC.. 09T3..	3,650
2234.45.063.80	2+2	63	133	50	80	2 SC.. 1204.. + 22 SC.. 09T3..	4,700
2234.45.080.85	2+3	80	138	50	85	2 SC.. 1204.. + 28 SC.. 09T3..	6,200
2234.45.100.95	3+3	100	148	50	95	3 SC.. 1204.. + 39 SC.. 09T3..	8,850

Ref.	1250 Torx	5620 Torx	1240 Torx	5615 Torx
2234.44.040.60	1250	5620	1240	5615
2234.44.050.65	1250	5620	1240	5615
2234.45.040.70	1250	5620	1240	5615
2234.45.050.75	1250	5620	1240	5615
2234.45.063.80	1250	5620	1240	5615
2234.45.080.85	1250	5620	1240	5615
2234.45.100.95	1250	5620	1240	5615

SC.. 1204..

SC.. 09T3..

Ref.	SC..	l	s	d	Positive 7° clearance - Square inserts.
	SC.. 09T3..	9,52	3,97	9,52	
SC.. 1204..	12,70	4,76	12,70		

SCGT-AL	SCMT-39	SCMW

For more information see page: A.16






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with DIN-69871 shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.



2234. ⁴⁷ / ₄₈			D	L2	K	a	Insert size	
Ref.	2234.47.040.60	1+2	40	105	40	60	1 SC.. 1204.. + 13 SC.. 09T3..	1,300
	2234.47.050.65	1+2	50	105	40	65	1 SC.. 1204.. + 14 SC.. 09T3..	1,650
	2234.48.040.70	1+2	40	123	50	70	1 SC.. 1204.. + 14 SC.. 09T3..	3,200
	2234.48.050.75	1+2	50	128	50	75	1 SC.. 1204.. + 16 SC.. 09T3..	3,700
	2234.48.063.80	2+2	63	133	50	80	2 SC.. 1204.. + 22 SC.. 09T3..	4,450
	2234.48.080.85	2+3	80	138	50	85	2 SC.. 1204.. + 28 SC.. 09T3..	5,950
	2234.48.100.95	3+3	100	148	50	95	3 SC.. 1204.. + 39 SC.. 09T3..	8,450

Ref.				
2234.47.040.60	1250	5620	1240	5615
2234.47.050.65	1250	5620	1240	5615
2234.48.040.70	1250	5620	1240	5615
2234.48.050.75	1250	5620	1240	5615
2234.48.063.80	1250	5620	1240	5615
2234.48.080.85	1250	5620	1240	5615
2234.48.100.95	1250	5620	1240	5615
	SC.. 1204..		SC.. 09T3..	

		SC..	l	s	d	Positive 7° clearance - Square inserts.
Ref.	SC.. 09T3..		9,52	3,97	9,52	
	SC.. 1204..		12,70	4,76	12,70	
	SCGT-AL	SCMT-39	SCMW			

For more information see page: A.16

Porcupine cutters
 Specific applications and sets
 Profile milling
 Solid carbide
 Drills
 Boring heads
 Arbors and adaptors

Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with BT shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.



2234. ⁴⁹ / ₅₀			D	L2	K	a	Insert size	
Ref.	2234.49.040.60	1+2	40	105	40	60	1 SC.. 1204.. + 13 SC.. 09T3..	1,400
	2234.49.050.65	1+2	50	105	40	65	1 SC.. 1204.. + 14 SC.. 09T3..	1,700
	2234.50.040.70	1+2	40	123	50	70	1 SC.. 1204.. + 14 SC.. 09T3..	3,300
	2234.50.050.75	1+2	50	128	50	75	1 SC.. 1204.. + 16 SC.. 09T3..	3,800
	2234.50.063.80	2+2	63	133	50	80	2 SC.. 1204.. + 22 SC.. 09T3..	5,100
	2234.50.080.85	2+3	80	138	50	85	2 SC.. 1204.. + 28 SC.. 09T3..	6,100
	2234.50.100.95	3+3	100	148	50	95	3 SC.. 1204.. + 39 SC.. 09T3..	8,400

Ref.				
2234.49.040.60	1250	5620	1240	5615
2234.49.050.65	1250	5620	1240	5615
2234.50.040.70	1250	5620	1240	5615
2234.50.050.75	1250	5620	1240	5615
2234.50.063.80	1250	5620	1240	5615
2234.50.080.85	1250	5620	1240	5615
2234.50.100.95	1250	5620	1240	5615
	SC.. 1204..		SC.. 09T3..	

Ref.	SC..	l	s	d	Positive 7° clearance - Square inserts.
	SC.. 09T3..	9,52	3,97	9,52	
SC.. 1204..	12,70	4,76	12,70		
	SCGT-AL	SCMT-39	SCMW		

For more information see page: A.16






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with Weldon shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.



23¹₃4.07

Ref.			D	L	L ₂	d	a	Insert size	
2314.07.025.30	2+2	25	125	60	25	30	CC.. 0602..	0,400	
	2+2	25	125	60	25	43	CC.. 0602..	0,400	
2324.07.032.30	2+2	32	130	60	32	30	CC.. 0803..	0,700	
	2+2	32	130	60	32	43	CC.. 0803..	0,650	
2334.07.040.30	2+2	40	130	60	32	30	CC.. 09T3..	0,800	
	2+2	40	130	60	32	43	CC.. 09T3..	0,800	

Ref.		
2314.07.025.30	1225	5607
	1225	5607
2324.07.032.30	1230	5608
	1230	5608
2334.07.040.30	1240	5615
	1240	5615

	CC..			l	s	d	Positive 7° clearance - 80° rhombic insert. For more information see page: A.16
	Ref.	CC.. 0602..	6,45	2,38	6,35		
		CC.. 0803..	8,05	3,18	7,94		
		CC.. 09T3..	9,65	3,97	9,52		
	CCGT-AL	CCKT	CCMW				

Porcupine cutters
Specific applications and sets
Profile milling
Solid carbide
Drills
Boring heads
Arbors and adaptors

Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use.

Milling cutter equipped with DIN-69871 shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.




2330.47
.48

Ref.			D	L2	K	a	Insert size	
2330.47.050.65		3	50	105	40	65	AP.. 1604..	1,650
2330.48.050.65		3	50	105	50	65	AP.. 1604..	3,700
2330.48.063.65		3	63	130	50	65	AP.. 1604..	4,450
2330.48.080.85		3	80	140	50	80	AP.. 1604..	5,950



Ref.	2330.47.050.65	1240	5615
	2330.48.050.65	1240	5615
	2330.48.063.65	1240	5615
	2330.48.080.85	1240	5615



AP..		l	s	d
Ref.	AP.. 1604..	16,00	4,76	9,52

Positive 11° clearance - Rectangular insert.

For more information see page: A.11

APFT	APHT-AL	APKT	APKT-26	APMT	APMT-26






Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with BT shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.



2330. ⁴⁹ _{.50}			D	L2	K	a	Insert size	
Ref.	2330.49.050.65	3	50	105	40	65	AP.. 1604..	1,700
	2330.50.050.65	3	50	105	50	65	AP.. 1604..	3,800
	2330.50.063.65	3	63	130	50	65	AP.. 1604..	5,100
	2330.50.080.85	3	80	140	50	80	AP.. 1604..	6,100

Ref.		
2330.49.050.65	1240	5615
2330.50.050.65	1240	5615
2330.50.063.65	1240	5615
2330.50.080.85	1240	5615

	AP..		l	s	d	Positive 11° clearance - Rectangular insert.
	Ref.	AP.. 1604..	16,00	4,76	9,52	
	APFT	APHT-AL	APKT	APKT-26	APMT	APMT-26

For more information see page: A.11

Porcupine cutters

Specific applications and sets

Profile milling

Solid carbide

Drills

Boring heads

Arbors and adaptors

Inserts

Face milling cutters

Square shoulder cutters

Slot cutters

Porcupine cutters




Characteristics:

Heavy roughing milling cutter that uses very strong inserts allowing deep passes and high feed per teeth. The insert is fixed by Torx screw that allow a good chip evacuation and easy use. Milling cutter equipped with Weldon shank.

Applications:

This heavy roughing cutter works well on steels, alloyed steels, stainless steels, refractory casts and aluminium alloys. This general milling cutter for diversified manufacture is recommended for conventional milling machines and machining centers.

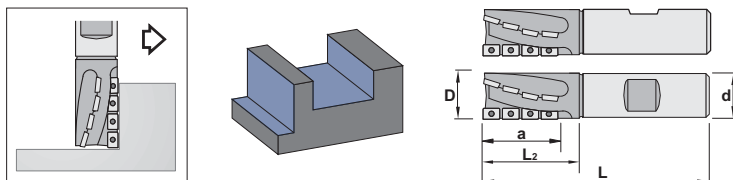

23²/₃0.07

Ref.		D	L	L2	d	a	Insert size	
2320.07.025.37	2	25	110	50	25	37	AP.. 1003..	0,400
2330.07.032.45	2	32	125	55	32	45	AP.. 1604..	0,650
2330.07.040.50	3	40	125	65	32	50	AP.. 1604..	0,800

Ref.		
2320.07.025.37	1425	5507
2330.07.032.45	1440	5515
2330.07.040.50	1440	5515

Ref.	AP..			Positive 11° clearance - Rectangular insert.		
	l	s	d			
AP.. 1003..	9,52	3,18	6,35			
AP.. 1604..	16,00	4,76	9,52			
				For more information see page: A.11		
	APFT	APHT-AL	APKT	APKT-26	APMT	APMT-26

Cutting data for porcupine milling cutters

Material	P	HB	Condition	Tool diameter D mm.	Basic qualities				Feed/tooth complete slot f _z
					TIN25	TIN41	PM25	KM15	
					Cutting speed m/min.				
Unalloyed steel	110	C<0,25%	C<0,8%	20-32	250-300		150-200		0,12-0,22
	170			150-200	100-140		0,15-0,39		
Low alloyed steel	125-225	Annealed	Hardened	20-32	150-200	100-150	90-140		0,10-0,21
	220-450			90-140	60-110	60-110	0,15-0,34		
High alloyed steel	150-250	Annealed	Hardened	20-32	130-170	80-120	80-120		0,10-0,21
	250-500			90-120	50-80		0,15-0,34		
Stainless steel	150-270	Martensitic/Ferritic		20-32	140-190	120-160	100-130		0,12-0,22
				40-50			0,15-0,34		
Steel castings	150	Unalloyed	Low alloyed	20-32	130-170		80-110		0,12-0,22
	150-220			110-150	50-90		0,15-0,34		
Stainless steel castings	160-200	High alloyed		40-50	80-120		50-80		0,15-0,34
	200				50-80				
				20-32					0,15-0,34

Material	HB	Condition	Tool diameter D mm.	Basic qualities				Feed/tooth complete slot f _z
				TIN25	TIN41	PM25	KM15	
				Cutting speed m/min.				
Stainless steel	150-220	Austenitic	20-32		80-160	70-130		0,12-0,23
			40-50				0,15-0,37	
Stainless steel castings	200	Austenitic	20-32		40-70	40-60		0,10-0,21
			40-50				0,15-0,34	
Heat resistant alloys Nickel or cobalt base	140-300	Annealed or treated solution	20-32				15-25	0,05-0,07
	300-475		Aged	40-50			12-20	
Titanium alloys	300-340	Annealed or treated solution	20-32				40-80	0,07-0,10
	320-380		40-50				30-60	

Material	K	HB	Condition	Tool diameter D mm.	Basic qualities				Feed/tooth complete slot f _z
					TIN25	TIN41	PM25	KM15	
					Cutting speed m/min.				
Malleable cast iron	110-145	Short chipping	Long chipping	20-32				60-80	0,12-0,23
	200-230			40-50				50-70	
Grey cast iron	180	Low tensile strength	High tensile strength, alloyed	20-32				70-100	0,12-0,23
	260			40-50				50-80	
Nodular cast iron Spheroidal graphite	160	Ferritic	Pearlitic	20-32				40-60	0,10-0,21
	250			40-50				30-50	
Aluminium alloys	60-150	Forged	Cast	20-32				300-500	0,23-0,39
	40-180			40-50				250-450	
Bronze-brass alloys	60-150			20-32				80-120	0,15-0,31
				40-50					



D/a _r	50	40	20	10	5	2,5	2	1,5	1
f ₁	4,5	4	3	2	1,5	1	1	1	1

When you trace a contour (side peripheral milling), you must multiply the f_z value of a complete slot (see table) by the correction factor f₁ corresponding to the relationship D/a_r (milling cutter diameter/radial cutting depth) in order to get a suitable feed.

Porcupine cutters

Specific applications and sets

Profile milling

Solid carbide

Drills

Boring heads

Arbors and adaptors